

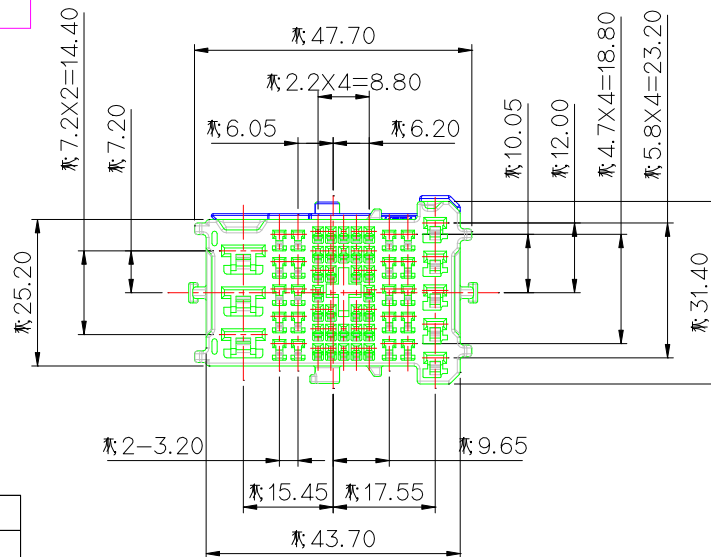


ISO VIEW





NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
* 1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

NO.	PART NAME	PART NO.	MATERIAL	COLOR	QTY.
①	025060110250 58F HOUSING	MG675980 MG675980-1	PBT	NATURAL RED	1
②	025060110250 58F SPACER	MG675981	PBT	YELLOW	1

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL(025II) : ST731374, ST731375
적용 TERMINAL(060) : ST731334, ST731335, ST731336
적용 TERMINAL(110) : ST731279, ST731280, ST731281
적용 TERMINAL(250) : ST731209, ST731210, ST731211
적용 CONNECTOR : MG645777
적용 LEVER : MG635656
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NOTE

- MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL(025II) : ST731374, ST731375
APPLICABLE TERMINAL(060) : ST731334, ST731335, ST731336
APPLICABLE TERMINAL(110) : ST731279, ST731280, ST731281
APPLICABLE TERMINAL(250) : ST731209, ST731210, ST731211
APPLICABLE CONNECTOR : MG645777
APPLICABLE LEVER : MG635656
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2015-06-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK
