

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED PER PCN E-17-010843	21MAR2018	JA	DM
		B1		REVISED PER PCN E-18-013976	03SEP2018	SS	DM
		B2		REVISED PER PCN E-19-004598	15MAR2019	DD	DM
		C		REVISED PER PCN E-19-014633	24APR2019	NS	RM

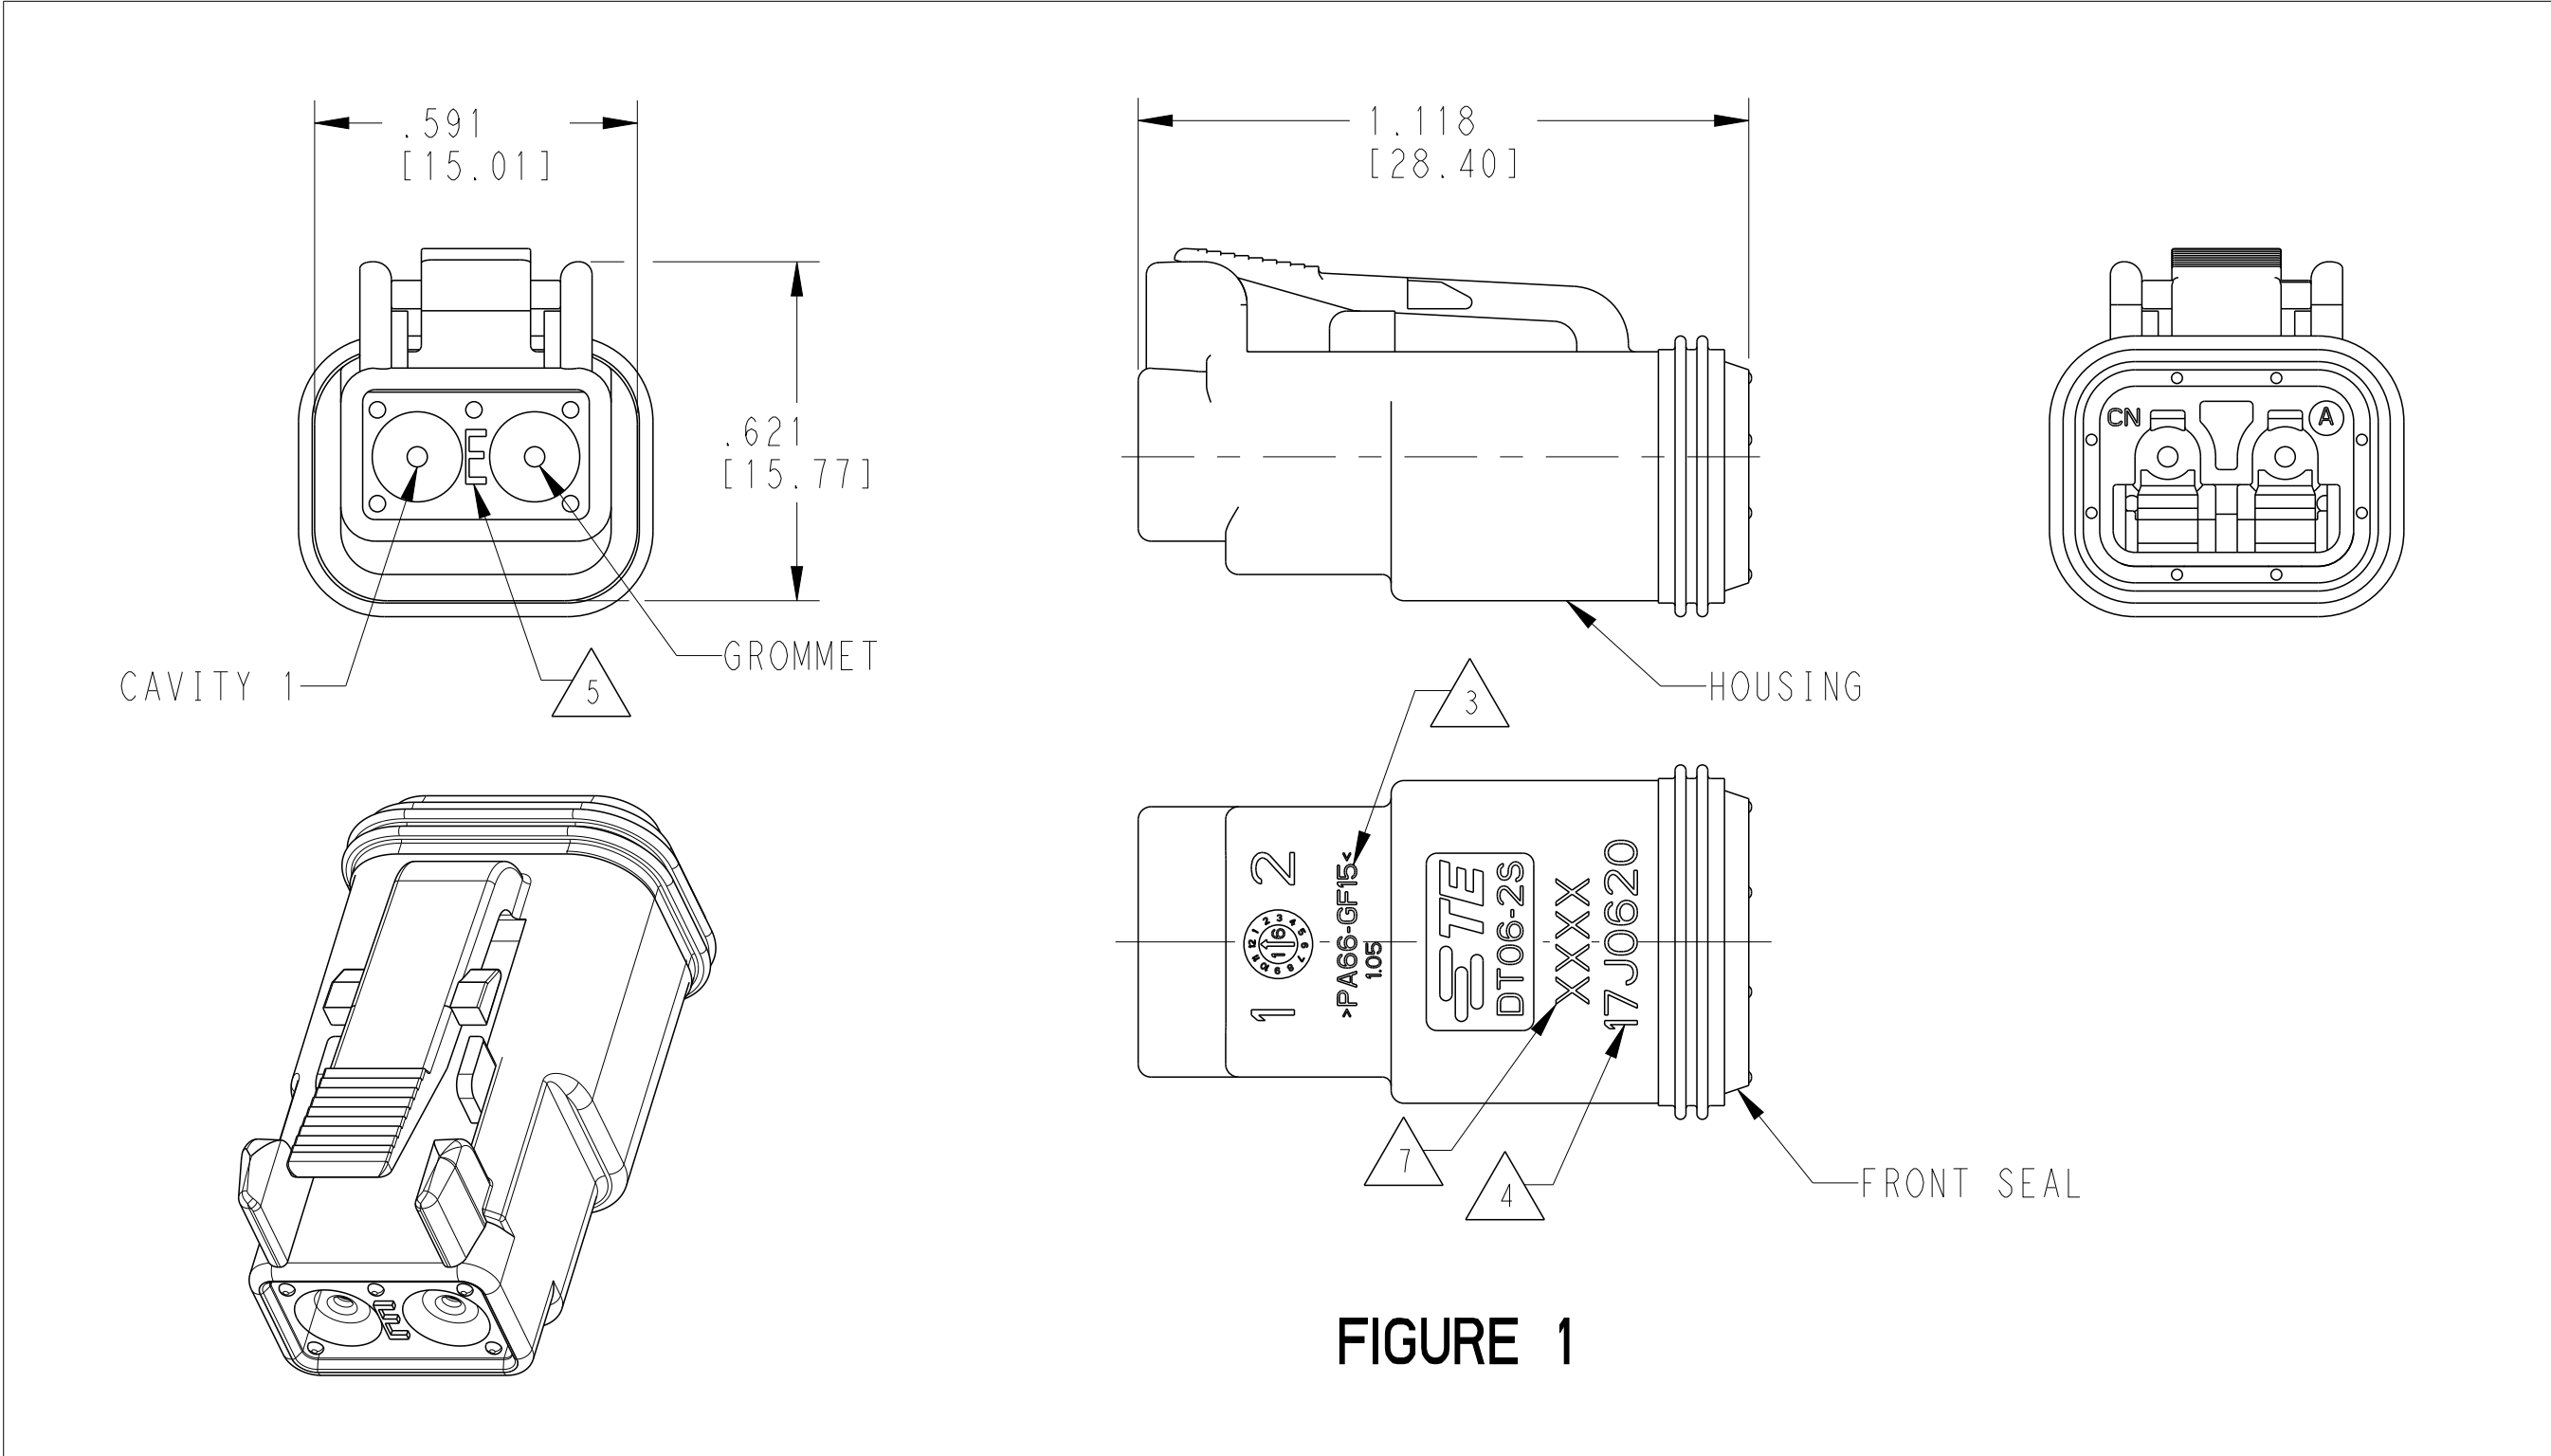


FIGURE 1

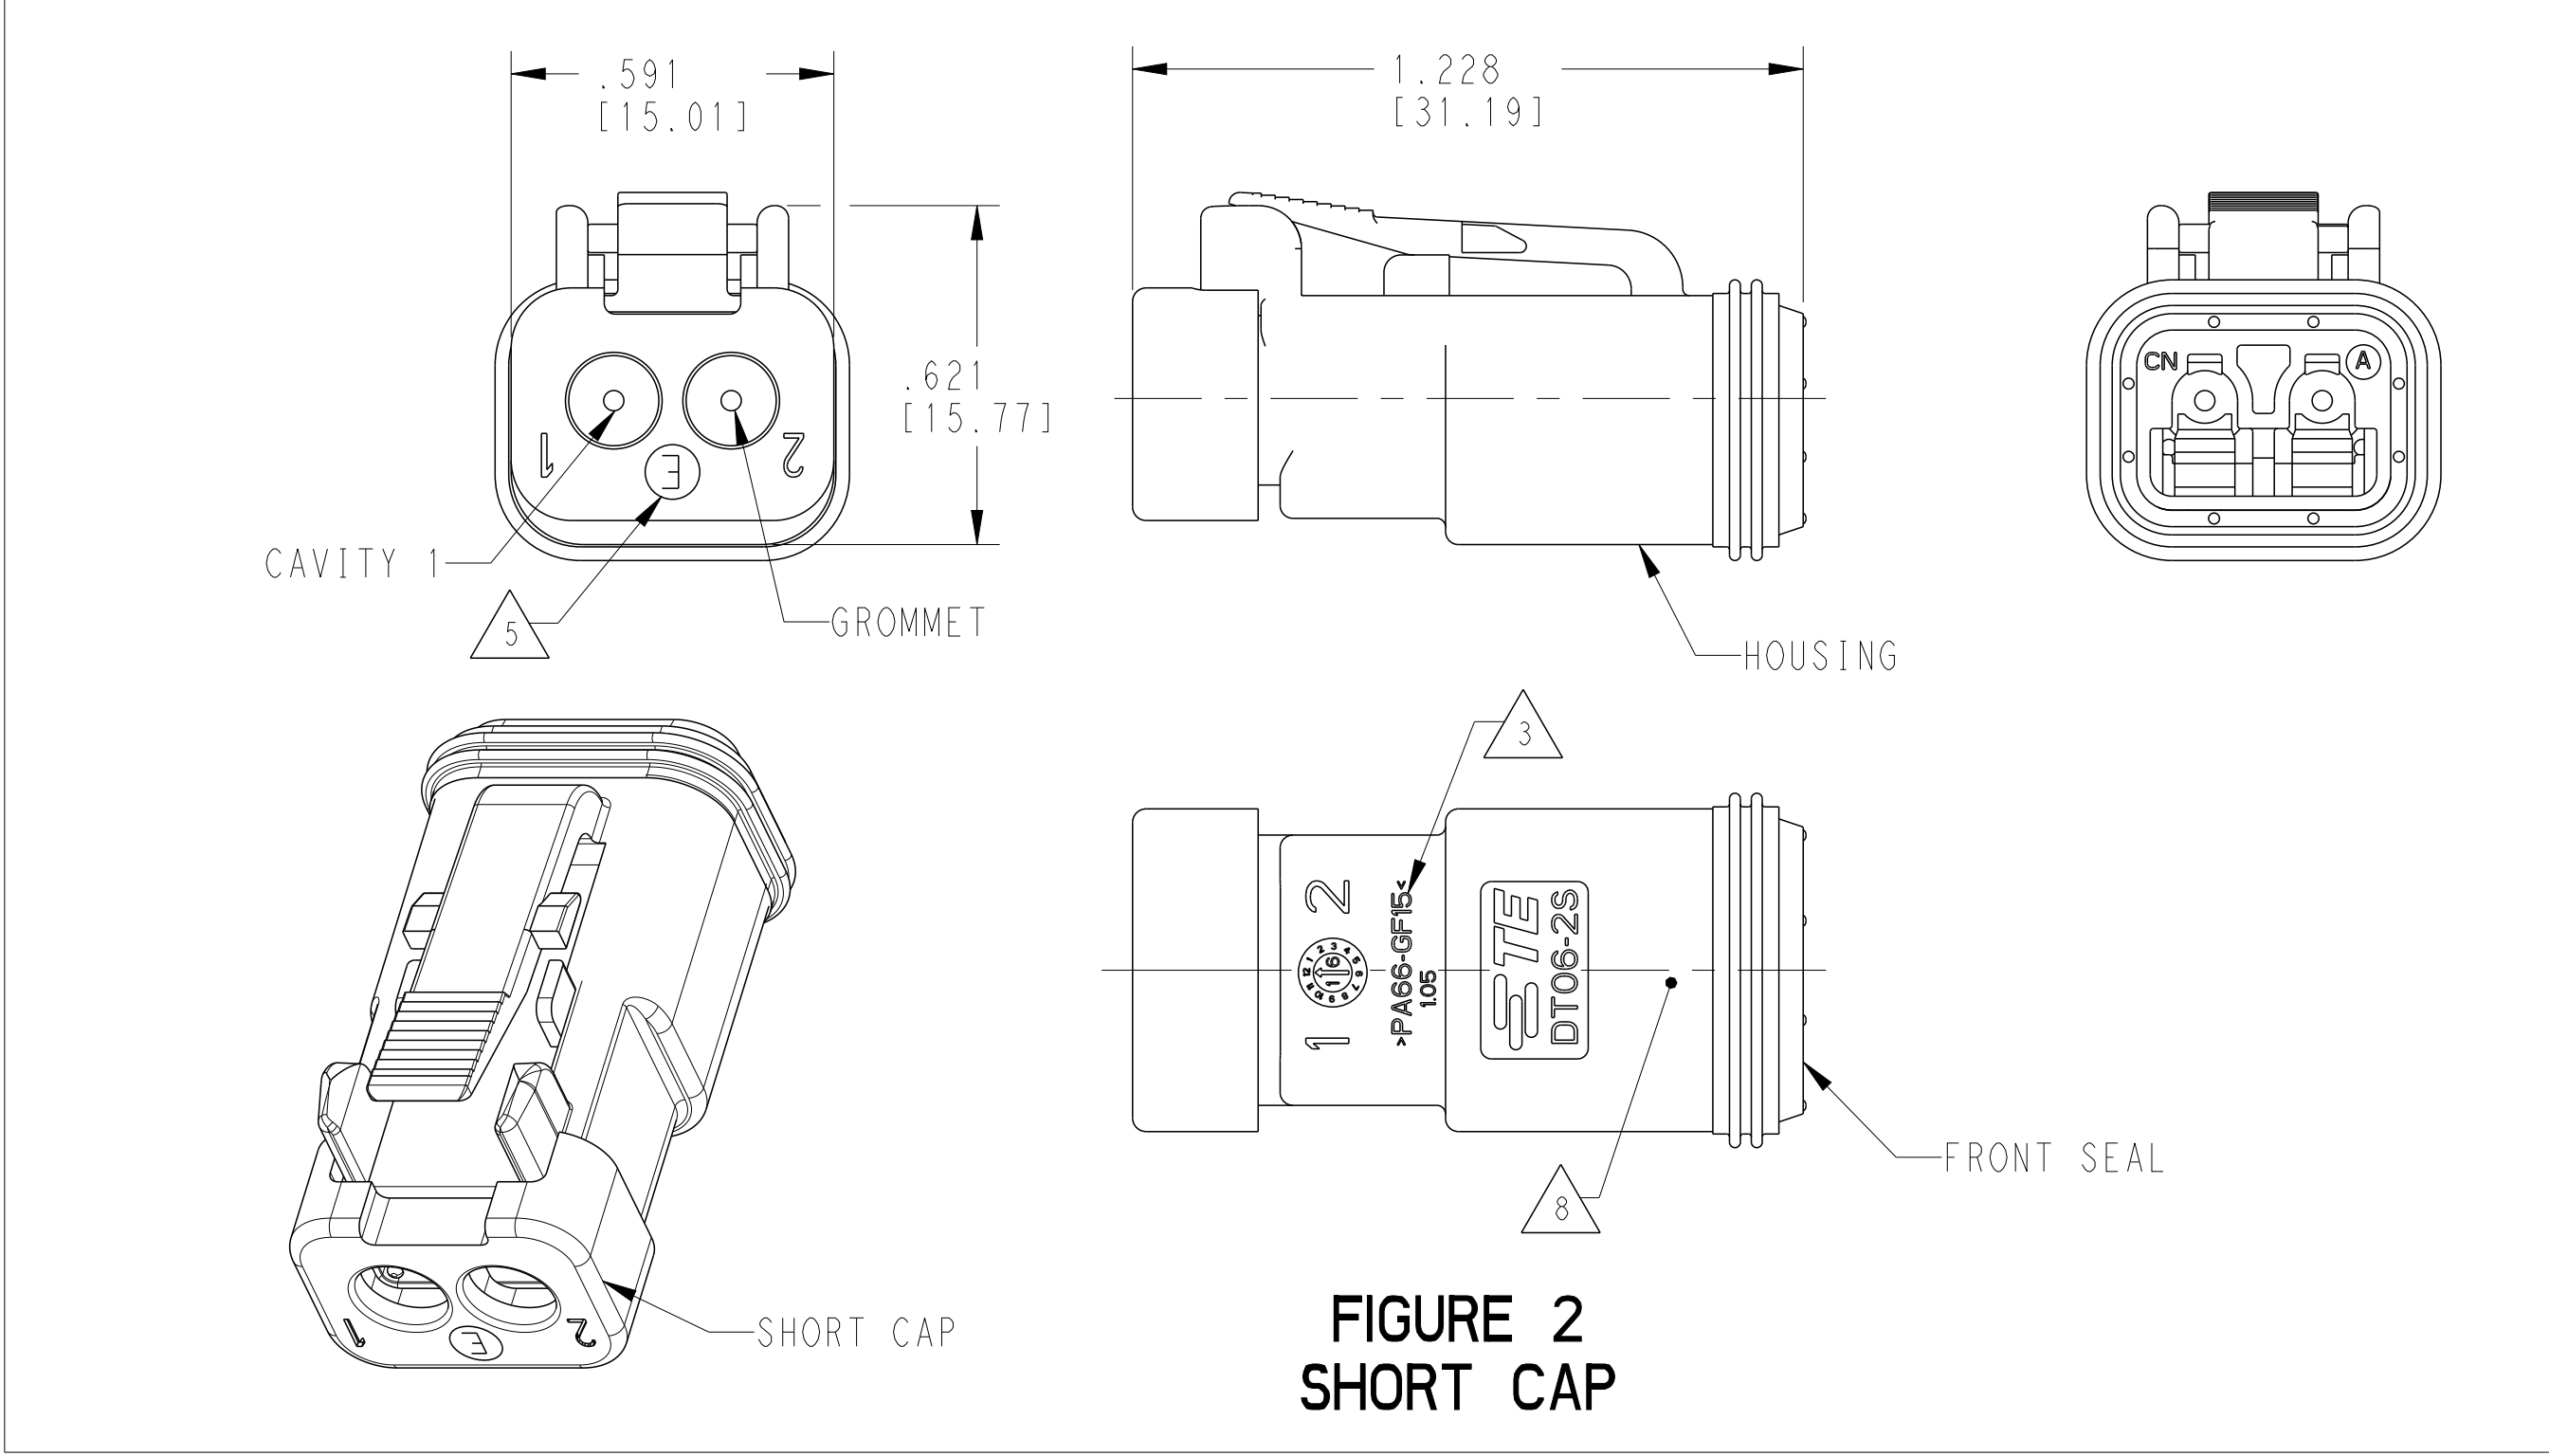


FIGURE 2
SHORT CAP

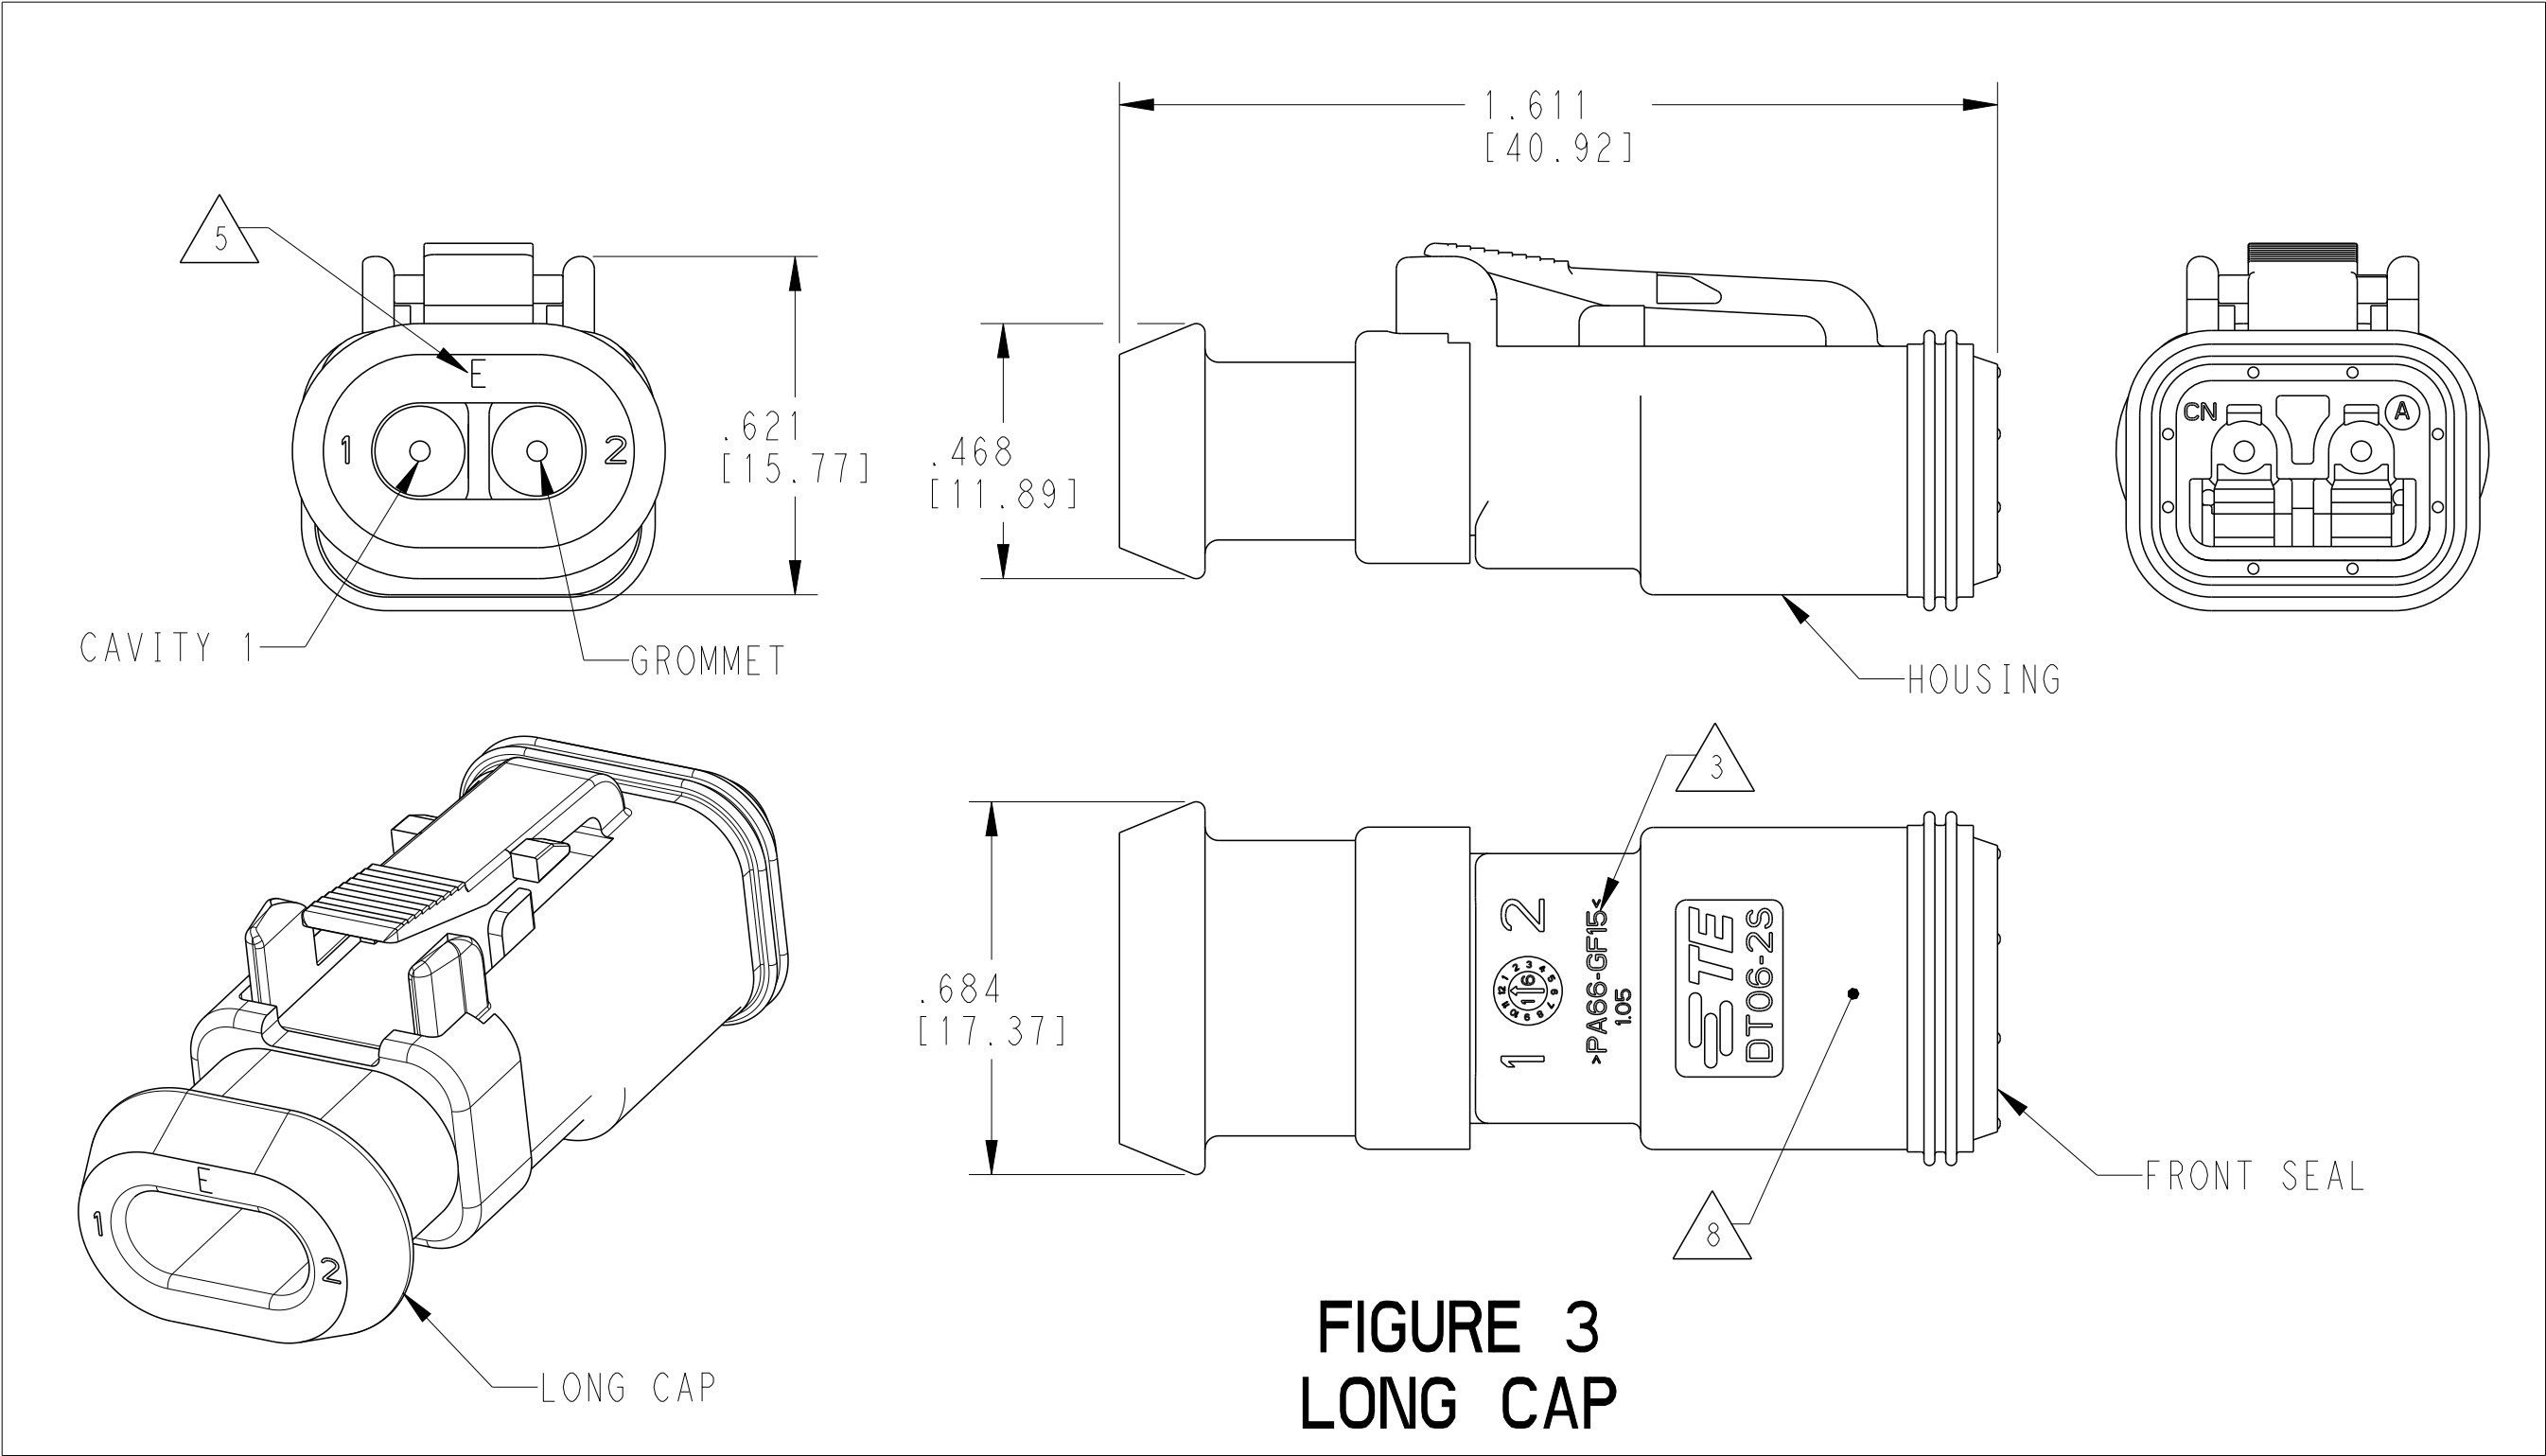


FIGURE 3
LONG CAP

CONTACT SIZE	WIRE RANGE	INSULATION OD SEALING RANGE	SEAL IDENTIFICATION
16	14-20 AWG [2.5-0.5mm ²]	.088-.145 [2.23-3.68]	STANDARD SEAL
		.053-.120 [1.35-3.05]	EXTRA THIN SEAL E-SEAL

TE INTERNAL PART NUMBER	DEUTSCH PART NUMBER	PN REV	COLOR	STANDARD SEAL GROMMET	EXTRA THIN SEAL E-SEAL GROMMET	SHORT CAP	LONG CAP	FIGURE
DT06-2S	DT06-2S	A	GREY	X				1
DT06-2S-C015	DT06-2S-C015	F	GREY		X			1
DT06-2S-CE01	DT06-2S-CE01	D	GREY		X	X		2
DT06-2S-CE03	DT06-2S-CE03	B	BLACK		X	X		2
DT06-2S-CE04	DT06-2S-CE04	B	GREY		X		X	3
DT06-2S-CE05	DT06-2S-CE05	B	BLACK		X	X		2
DT06-2S-CE06	DT06-2S-CE06	B	BLACK		X			1
DT06-2S-CE13	DT06-2S-CE13	B	BLACK		X		X	3
DT06-2S-E003	DT06-2S-E003	A	GREY	X		X		2
DT06-2S-E004	DT06-2S-E004	A	BLACK	X				1
DT06-2S-E005	DT06-2S-E005	A	BLACK	X		X		2
DT06-2S-E008	DT06-2S-E008	A	GREY	X			X	3
DT06-2S-EP04	DT06-2S-EP04	B	GREY	X		X		2
DT06-2S-EP06	DT06-2S-EP06	B	BLACK	X		X		2
DT06-2S-EP11	DT06-2S-EP11	A	BLACK	X			X	3
DT06-2S-P004	DT06-2S-P004	A	GREY	X				1
DT06-2S-P012	DT06-2S-P012	A	BLACK	X				1

- 3 MATERIAL: HOUSING: PA66 GF15, SEE TABLE FOR COLOR
SHORT, LONG CAP: PA66 GF15, SEE TABLE FOR COLOR
GROMMET: E-SEAL VMO (BURNT RED)
N-SEAL VMO (RED-ORANGE)
FRONT SEAL: VMO (RED-ORANGE),
2. THIS PLUG MATES WITH DT04-2P-XXXX RECEPTACLE.
(XXXX = ALL MODIFICATIONS)
1. SECONDARY WEDGE LOCK SOLD SEPARATELY: W2SX-XXXX.
(X = A,B,C,D KEY, XXXX = ALL MODIFICATIONS)
W2S OR W2S-P012 MAY BE USED WITH THESE PLUGS,
W2S-P012 IS RECOMMENDED.
- NOTES: UNLESS OTHERWISE SPECIFIED

- 7 XXXX IDENTIFIES THE MODIFICATION NUMBER,
IF APPLICABLE. EXAMPLE: "E003" FOR DT06-2S-E003,
OR BLANK FOR DT06-2S.
6. FOR CONTACTS AND WIRE PERFORMANCE AND APPLICATION
CHARACTERISTICS SEE CUSTOMER DRAWING 0425-015-0000.
- 5 "E" IDENTIFIES E-SEAL.
- 4 DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGITS. (17 = 2017)
MONTH: THIRD DIGIT, EXCLUDING I. A = JAN, B = FEB,
C = MARCH ... (K = OCTOBER)
DAY: FOURTH AND FIFTH DIGITS (14 = 14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS (11 = 11AM)

- 8 ADDITIONAL MARKING PER NOTE 4 AND 7
EXCLUSIVELY FOR PARTS WITH CAPS PRODUCED
IN CHINA.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: JAIME C. APOSTOL CHK: D. MEYER APVD: D. MEYER PRODUCT SPEC 108-151009 APPLICATION SPEC 114-151009 WEIGHT	24OCT2016 24OCT2016 24OCT2016
DIMENSIONS: in [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±0°30'0"	NAME: 2 WAY PLUG, STANDARD SEAL EXTRA THIN SEAL SHORT CAP AND LONG CAP, DT SERIES	SIZE: 4AFU8 CAGE CODE: 114-151009 DRAWING NO: 114-151009 RESTRICTED TO: -
MATERIAL: 3		CUSTOMER DRAWING	SCALE: 3:1 SHEET: 1 OF 1 REV: C