
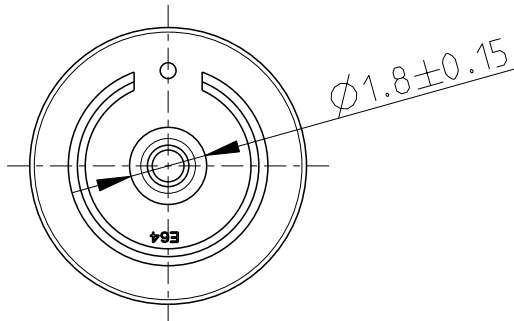
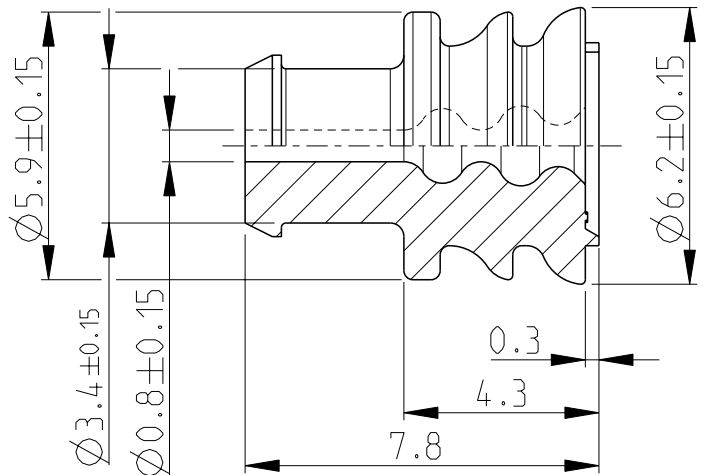



LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M8	REVISED PER ECO-11-005150	31MAR2011	RK	HMR
			M9	REVISED PER ECO-16-012850	31AUG2016	M.G.	M.G.

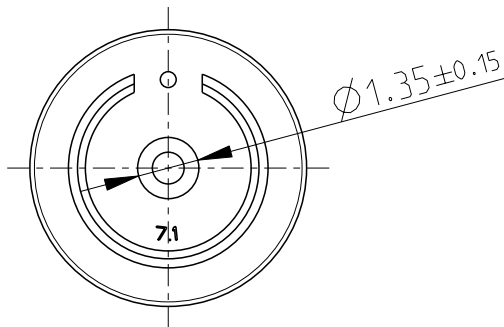

ALTERNATIVE DESIGN ADMITTED:


BEMERKUNGEN
NOTES

- Einzelheiten der Ausfuehrung bleiben dem hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- Passend fuer Drahtgroessenbereich: 0.35-1.0mm²
SUITABLE FOR WIRE SIZE RANGE:
- Passend fuer Isolationsdurchmesser: 1.2-2.1mm
SUITABLE FOR INSULATION DIAMETER:
- Bestueckungshilfe fuer Einzelleiterabdichtung siehe: TE Connectivity: 3-1579007-2
INSERTER FOR SINGLE WIRE SEAL SEE:
- Keine Luftloecher zulaessig
NO AIR BUBBLES PERMITTED



1:1

828920-2	M	DARK BLUE	VMQ-50Shore A SILICON OIL FREE
828920-1	M	GREY	VMQ-50Shore A SELF-LUBRICATED
PART NO.	REV.	COLOUR	MATERIAL

DIMENSIONS:		DWN Gaupp.P.	17APR1997	MATERIAL		SEE TABLE		FINISH		-	
mm		CHK Kuempel.D.	21APR1997	TE Connectivity							
TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN 16901-160		APVD	-								
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±°		PRODUCT SPEC		NAME SINGLE WIRE SEAL FOR 2.5mm CTC. SYSTEM							
		108-18263-1									
		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		-		A 4		00779		C-828920		-	
		WEIGHT 0.106g		CUSTOMER DRAWING							
				SCALE 6:1		SHEET 1 OF 1		REV M9			

