
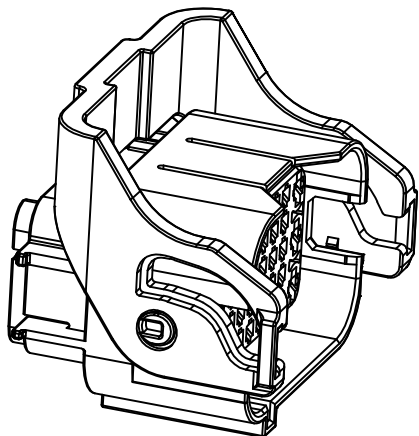



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REVISED (ECR-06-027317)	29.JAN.'07	SW	JK
		C		REVISED (ECR-07-017139)	23.JUL.'07	KT	JK
		D		REVISED (ECR-08-010020)	12.JUN.'08	KT	HG
		D1		REVISED (ECR-10-010186)	25.MAR.'10	WY	HG
		E		REVISED (ECR-11-025917)	20.FEB.'12	SJ	HG
		E1		REVISED (ECR-16-009129)	23.JUN.'16	SJ	JW

3D-EXPLODE VIEW
SCALE 1/1

- NOTES;
1. GENERAL TOLERANCE IS ± 0.3 , $\pm 3^\circ$
 2. CONDITION OF DELIVERY
 3. APPLIED CAP ASS'Y P/N: X-1743062-X
APPLIED WIRE COVER P/N: X-1743064-X
 4. APPLIED RECEPTACLE CONTACT P/N: TABLE 1
 5. APPLIED WIRE SEAL P/N: TABLE 2

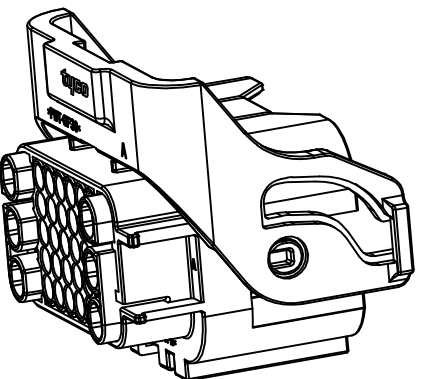

3D-VIEW
SCALE 1/1

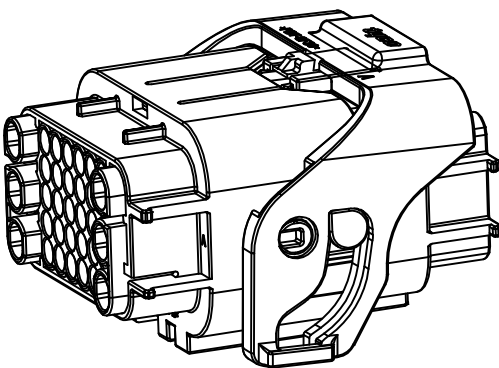

3D-CAP & PLUG ASSEMBLY
SCALE 1/1

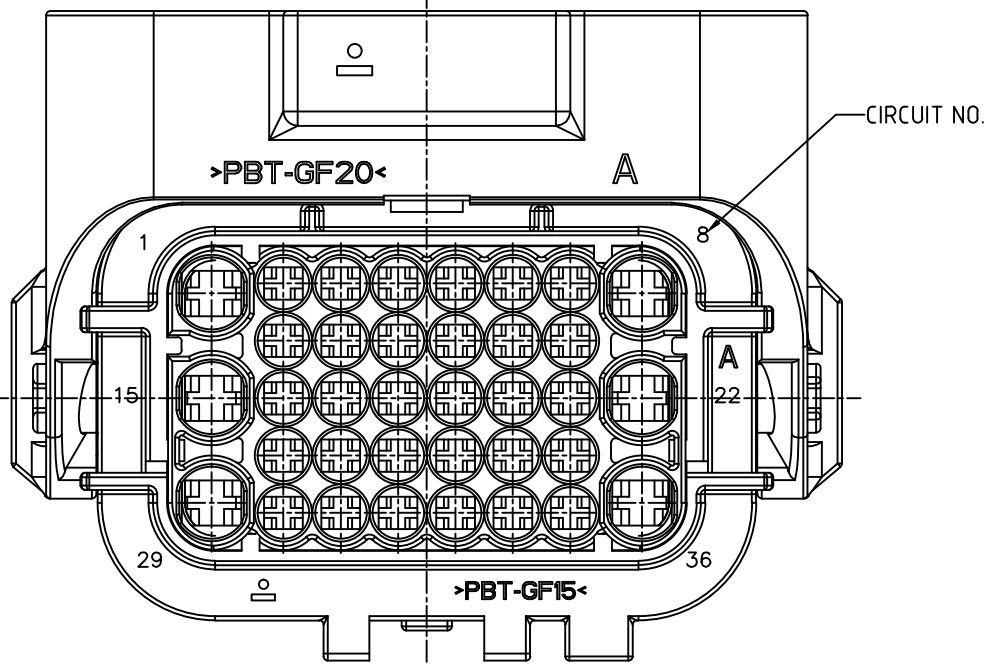


TABLE 1-			
TYPE	Part NO.	WIRE SIZE(mm ²)	FINISH
MT II	0-962875-1	0.25-0.5	CuSn4
	0-962875-3		CuSn4(GOLD)
	0-962876-1	0.5-1.0	CuSn4
	0-962876-3		CuSn4(GOLD)
JPT	0-927770-3	0.5-0.85	CuSn4
	2-927770-1		CuSn4(GOLD)
	0-927766-3	1.25-2.0	CuSn4
	2-927766-1		CuSn4(GOLD)

TABLE 2-			
TYPE	Part NO.	WIRE INSULATION DIAMETER(mm)	COLOR
MT II	964971-1	1.2 ~ 1.6	RED
	963530-1	1.7 ~ 1.9	GRAY
	963531-1	CAVITY PLUG	WHITE
	828904-1	1.2 ~ 2.1	BLUE
JPT	828905-1	2.2 ~ 3.0	WHITE
	828922-1	CAVITY PLUG	NATURAL

				ASS'Y P/N			
				0-1743059-1	0-1743059-2	1-1743059-2	0-1743059-3
4	-	SILICONE	INNER SEAL	1	1	1	1
3	GRAY(RAL 7004)	PBT-GF20	LEVER HSG	1	1	-	1
	BLACK(RAL 9011)	PBT-GF20		-	-	1	-
	DARK GREY(RAL 7012)	PBT-GF15	MAIN BODY PLUG HSG	-	-	-	1
2	BLACK(RAL 9011)	PBT-GF15		-	1	1	-
	NATURAL	PBT-GF15		1	-	-	-
1	BLACK(RAL 9011)	PBT-GF15	FRONT PLUG HSG	1	1	1	1
NO.		COLOR	MATERIAL	DESCRIPTION			
				Q'TY			



PLUG ASS'Y FOR MTII/JPT 36P

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	1743059	-
CUSTOMER DRAWING			
SCALE		SHEET	REV
2/1		1 OF 1	E1

SECTION A-A

